


cat. Pelle Luxury

Star

bolzan

STAR

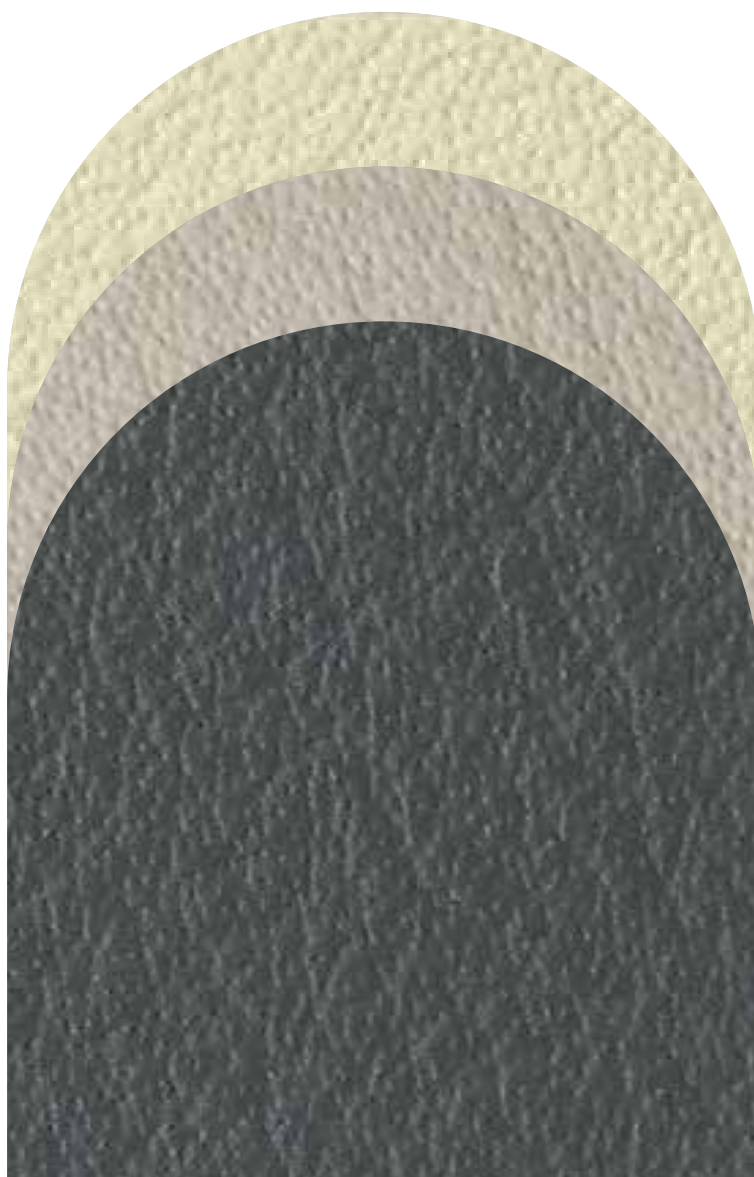

PHYSICAL SPEC.**COLOUR FASTNESS****TO-AND-FRO RUBBING**

UNI EN ISO 11640

500 dry cycles,

≥ 4 degradation, ≥ 4 staining

UNI EN ISO 11640

250 wet cycles,

≥ 3/4 degradation, ≥ 3/4 staining

UNI EN ISO 11640

80 alk. perspiration cycles,

≥ 3/4 degradation, ≥ 3/4 staining

COLOUR FASTNESS**TO LIGHT**

EN ISO 105-B02

xenotest, ≥ 4 blue scale

TEAR STRENGTH

UNI EN ISO 3377-1

≥ 20 N

WATER SPOTTING

UNI EN ISO 15700

≥ 3 grey scale

FINISH ADHESION

UNI EN ISO 11640

≥ 2 N/cm

FLEXING ENDURANCE

UNI EN ISO 5402

≥ 50.000 cycles

COLD CRACK RESISTANCE OF**FINISH**

UNI EN ISO 3377-1

-15°, no crack

FIRE RESISTANCE

UNI EN 1021-1, UNI EN 1021-2,

BS 5852/0, BS 5852/1

TECHNICAL SPEC.**THICKNESS**

0,9 - 1,0 mm

TANNING

mineral chrome

COLOR TYPE

solid tone

DYEING

through-dyeing Aniline

**GENERAL WARNINGS**

slight differences in colour may occur

MAINTENANCE AND CLEANING

dust with a soft and dry cloth; remove stains using a damp cloth and neutral soap or a delicate detergent. Buffer from the edges to the stain centre. No abrasive/aggressive products; no product for shoes cleaning; no steam; no direct sunlight; no direct heat

cat. Pelle Luxury

Seta

bolzan

SETA



PHYSICAL SPEC.

COLOUR FASTNESS

TO-AND-FRO RUBBING

UNI EN ISO 11640

500 dry cycles,

≥ 4 degradation, ≥ 4 staining

UNI EN ISO 11640

250 wet cycles,

≥ 3/4 degradation, ≥ 3/4staining

UNI EN ISO 11640

80 alk. perspiration cycles,

≥ 3/4 degradation, ≥ 3/4staining

COLOUR FASTNESS

TO LIGHT

EN ISO 105-B02

xenotest, ≥ 4 blue scale

TEAR STRENGTH

UNI EN ISO 3377-1

≥ 20 N

WATER SPOTTING

UNI EN ISO 15700

≥ 3 grey scale

FINISH ADHESION

UNI EN ISO 11640

≥ 2 N/cm

FLEXING ENDURANCE

UNI EN ISO 5402

≥ 50.000 cycles

COLD CRACK RESISTANCE OF FINISH

UNI EN ISO 3377-1

-15°, no crack

FIRE RESISTANCE

UNI EN 1021-1, UNI EN 1021-2,

BS 5852/0, BS 5852/1

TECHNICAL SPEC.

RAW MATERIAL/APPEARANCE

bovine/natural grain

THICKNESS

0,9 - 1,0 mm

TANNING

mineral chrome

COLOR TYPE

solid tone

DYEING

through-dyeing Aniline





GENERAL WARNINGS

slight differences in colour may occur

MAINTENANCE AND CLEANING

dust with a soft and dry cloth; remove stains using a damp cloth and neutral soap or a delicate detergent. Buffer from the edges to the stain centre. No abrasive/aggressive products; no product for shoes cleaning; no steam; no direct sunlight; no direct heat

bolzan