


FABRICS

FIELD 2 (KVADRAT, FABRIC II)



233



242




182



773



733




723



663




643



623



943




963




192


MAIN LINE FLAX (CAMIRA, FABRIC II)




08 Lambeth




09 Monument




35 Brompton




18 Tufnell




24 Bayswater



16 Temple



31 Goldhawk



13 Leyton




14 Parsons



23 Bank



15 Stockwell




26 Camden


REMIX 3 (KVADRAT, FABRIC II)




0123



0173



0733



0632




0653



0612



0933



0912



0923



0113




0223




0242

FABRICS


REVIVE 1 (KVADRAT, FABRIC II)




534 deep orange – white




144 pastel blue – white




764 pastel blue – bluish black




274 biscuit – taupe




324 biscuit – white



424 bright yellow – ochre yellow




224 white – light grey



944 pastel blue – olive green




454 pastel yellow – graphite grey



414 pastel yellow – pearl white



194 black



154 black – pearl white



Field 2

Design: Alfredo Häberli

Type: Upholstery, panel fabric

In accordance with California Bill AB 2998 and similar legislation within the United States, this product may not be used as upholstery. It can be used for vertical applications.

Composition: 100% Trevira CS

Yarn type: Filament

Binding: Panama

Width: Approx. 140 cm, 55 inches

Weight: Approx. 450 g/lin.m, 14.5 oz/ly

Repeat: None

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Also washable at 60-80°C, half wash load. Drip drying.

Mount in moist condition. Shrinkage app. 2% at 60°C.

Be aware of increased shrinking and creasing the higher the temperature.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year
warranty



Field 2

Abrasion

Approx. 80.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 4-5, EN ISO 12945

Seam slippage

Seam parallel to warp: 4.0 mm parallel to weft: 3.5 mm
EN ISO 13 936-2 180 Newton

Lightfastness

Note 6-7 ISO 105-B02

Fastness to rubbing

Dry note 4-5 ISO 105-X12

Wet note 4-5 ISO 105-X12

Absorption

0.55/Class D (flat), 0.85/Class B (waved) EN ISO 354

Airflow

431 Pa s/m EN 29053

Flame resistance

AS/NZS 3837 class 1

ASTM E84 Class A Unadhered

BS 5852 Crib 5

BS 5852 Part 1 with treatment *

BS 5867 Part 2 type B

CAN ULC S102

CAN ULC S109

DIN 4102 B1

EN 1021-1/2

EN 13501-1 B-s1, d0

FAR 25.853

GB 8624 B1

IMO FTP Code 2010 Part 5

IMO FTP Code 2010 Part 8

NF D 60 013

NF P 92 507 M1

NFPA 701

ÖNORM B1/Q1

SN 198 898 5.2

UNI 9175 1IM

UNI 9177 Classe 1

US Cal. Bull. 117-2013

** To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now the external finisher may use a treatment containing halogen based flame retardants.*

kvadrat

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013

Dry & Wet Crocking

Dry Crocking: Grade 5.0

Wet Crocking: Grade 5.0

Colour Fastness to Light

Grade 4.5 minimum 40 hours

Physical properties

Pilling Class 4-5

Breaking Strength warp 274 / weft 282 lbs.

Seam Slippage warp 98.5 / weft 93.5 lbs.

Abrasion

80.000 cycles Martindale – High Traffic / Public Spaces

Quality benefits

Complies with Möbelfakta

Very good abrasion

Very good lightfastness

Permanent flame retardant

Washable

Environmental benefits

EU Ecolabel compliant

Free of intentionally added PFAS

No use of halogen-based flame retardants (incl. brominated and chlorinated)

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Mono material designed for circularity

Green building certificates

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): 3rd Party Verified.

ISO 14025 & EN 15804. Developed in accordance with the European standard EN 15804+A2.

Health Product Declaration (HPD): Declaring textile content and substance

Country of origin

Holland

Launch

2008

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk

kvadrat

Main Line Flax - Product information



Task seating



Soft seating



Panels



Curtains



Cigarette & Match



Medium Hazard



IMO FTP Code (Part 8)



Environmental



Acoustic



Year guarantee

Technical information

UK

Composition 75% Virgin Wool, 25% Flax
Environment Certified to the EU Ecolabel Certified to Indoor Advantage™ Gold Environmental Product Declaration - Natural Fabric Composition Rapidly renewable and compostable Made from wool and plant fibre
Width 140 cm minimum
Weight 437g/m² ±5% (612g/lin.m ±5%)
Abrasion Resistance* Heavy duty / 10 year guarantee. Independently certified to ≥50,000 Martindale cycles

Flammability EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 (58kg/m³ CMHR Foam) UNI 9175 Classe 1 IM BS 476 Part 7 Class 1 (Adhered) EN 13501-1 Adhered Class B, s1 ,d0 BS 5867-2: Type B Curtains & Drapes IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match) <i>Note: Flammability performance is dependent on components used; full details are listed within our certificates. Customers must ensure their complete furniture meets the necessary standards.</i>

Light Fastness 4-5 (ISO 105 - B02)
Fastness to Rubbing Wet; 3, Dry: 4 (ISO 105 - X12)
Acoustic Properties Acoustically transparent. Acoustic graphs available upon request

Cleaning Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning use steam or professionally dry clean. Full details can be found in our cleaning and disinfection guide.

*Results from abrasion testing are highly variable and are therefore not a reliable indicator of the wear performance of the fabric. All independent certification is supported by a 10 year durability guarantee. Internally we specify this product at >35,000 cycles which we believe is realistic for repeatability of testing.

The stated technical and environmental performance of a fabric may be affected by the post treatment applied. Product guarantees for the post treatment of fabrics undertaken by Camira are guaranteed for 5 years.

Please note that seam performance is dependent on seam construction, needle and thread type. We recommend that appropriate sewing advice be taken.

Batch to batch shade variations may occur within commercial tolerances. We reserve the right to alter technical specifications without notice. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.

D

Zusammensetzung 75% Schurwolle, 25% Flachs
Umweltfreundlich Nach Zertifikat EU Ecolabel Nach Zertifikat Indoor Advantage™ Gold Umweltproduktdeklaration – Stoffe aus Naturfasern Schnell erneuerbar und kompostierbar Mit Wolle und Pflanzfasern gefertigt
Breite 140 cm nutzbare Breite
Gewicht 437g/m² ±5% (612g/ldf.m ±5%)
Scheuerfestigkeit* Schwerer Objekteinsatz / 10 Jahre Garantie. Extern zertifiziert mit ≥50,000 Scheuertouren Martindale

Feuersicherung EN 1021 - 1 (Zigarettentest) EN 1021 - 2 (Streichholzttest) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 (mit 58 kg/m³ CMHR Schaum) UNI 9175 Classe 1 IM BS 476 Part 7 Class 1 (Adhered) EN 13501-1 Adhered Class B, s1 ,d0 BS 5867-2: Type B Curtains & Drapes IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK Wohnmöbel Zigarettentest und Streichholzttest) <i>Bemerkung: Die Entflammbarkeit hängt von den verwendeten Komponenten ab ; die Details sind in unseren Zertifikaten beschrieben. Der Kunde muss sicherstellen, dass das gesamte Möbelstück die erforderlichen Normen erfüllt.</i>

Lichtechtheit 4-5 (ISO 105 - B02)
Reibechtheit Nass: 3, Trocken: 4 (ISO 105 - X12)

Akustische Eigenschaften Akustisch durchlässig. Akustische Messwerte auf Anfrage
Reinigung Regelmässig absaugen. Mit einem feuchten Tuch abwischen oder mit einem geeigneten Polstershampoo behandeln. Für eine Grundreinigung bitte Dampf oder professionelle Trockenreinigung verwenden. Weitere Informationen finden Sie in unserem Leitfaden zur Reinigung und Pflege.

*Ergebnisse von Scheuerfestigkeitsprüfungen sind variabel und kein zuverlässiger Indikator für die Verschleißleistung des Stoffes. Alle neutralen Zertifizierungen werden durch eine 10-Jahres-Garantie unterstützt. Intern spezifizieren wir dieses Produkt mit >35.000 Scheuertouren, um die Wiederholbarkeit der Testergebnisse zu gewährleisten.

Die angegebene technische und ökologische Eigenschaft eines Stoffes kann durch die nachträgliche Ausrüstung beeinflusst werden. Die Garantie für die nachträgliche Ausrüstung von Stoffen durch Camira, beträgt 5 Jahre.

Bitte beachten Sie, dass die Nahtfestigkeit von der Nahtkonstruktion, der Nadel und dem Fadentyp abhängt. Wir empfehlen, eine entsprechende Näh-Beratung in Anspruch zu nehmen.

Handelsübliche Farbabweichungen von Produktionslosen können auftreten. Wir behalten uns das Recht vor, technische Spezifikationen ohne Vorankündigung zu ändern. Nicht eingetragene Designrechte und das Urheberrecht an allen Designs sind das exklusive Eigentum von Camira Fabrics Limited.

F

Composition 75% Laine Vierge, 25% Lin
Écologique Avec le certificat EU Ecolabel Certifié à Indoor Advantage™ Gold Declaration environnementale du produit - tissu de composition naturelle Rapidement renouvelable et compostable Fabriqué avec de la Laine et des fibres originaire
Largeur 140 cm minimum
Poids 437g/m² ±5% (612g/m.l ±5%)
Résistance à l'abrasion* Usage intense / garantie 10 ans. Certificat indépendant ≥50,000 cycles Martindale

Flammabilité EN 1021 - 1 (cigarette) EN 1021 - 2 (allumette) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 (sur 58 kg/m³ CMHR mousse) UNI 9175 Classe 1 IM BS 476 Part 7 Class 1 (Adhered) EN 13501-1 Adhered Class B, s1 ,d0 BS 5867-2: Type B Curtains & Drapes IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domicile cigarette et allumette) <i>Notez: Les performances d'inflammabilité dépendent des composants utilisés; tous les détails sont énumérés dans nos certificats. Les clients doivent s'assurer que leur mobilier complet répond aux normes nécessaires.</i>
--

Solidité à la lumière 4-5 (ISO 105 - B02)
Solidité au Frottement Mouillé: 3, Sec: 4 (ISO 105 - X12)

Propriétés Acoustiques Acoustiquement transparent. Graphiques acoustiques disponibles sur demande

Nettoyage Passez l'aspirateur régulièrement. Essayez avec un chiffon humide en utilisant un shampoing/ savon pour tissus d'ameublement exclusif. Pour un nettoyage en profondeur, utilisez la vapeur ou un nettoyage à sec professionnel. Vous trouverez tous les détails dans notre guide de nettoyage et de désinfection.

*Les résultats des tests d'abrasion sont très variables et ne sont donc pas un indicateur fiable des performances d'usure du tissu. Toute certification indépendante est soutenue par une garantie de durabilité de 10 ans. En interne, nous spécifions ce produit à >35.000 cycles qui, selon nous, est réaliste pour la répétabilité des tests.

Les performances techniques et environnementales d'un tissu peuvent être affectées par le post-traitement appliqué. Les garanties de produit pour le post-traitement des tissus entrepris par Camira sont garanties pendant 5 ans.

Veillez noter que la performance des coutures dépend de la construction des coutures, du type d'aiguille et de fil. Nous recommandons que des conseils de couture appropriés soient pris.

Des variations de teinte de lot à lot peuvent se produire dans les tolérances commerciales. Nous nous réservons le droit de modifier les spécifications techniques sans préavis. Les droits de conception non enregistrés et le droit d'auteur sur tous les dessins sont la propriété exclusive de Camira Fabrics Limited.

ES

Composición 75% Lana Virgen, 25% Lino
Ambiental Certificado con EU Ecolabel Certificado de Indoor Advantage™ Gold Declaración Medio Ambiental de Producto – Tejido Composición Natural Rapidamente renovable y compostable Producido con lana y fibras naturales
Ancho 140 cm mínimo
Peso 437g/m² ±5% (612g/lin.m ±5%)
Resistencia a la abrasión* Garantía de 10 años con uso intenso independientemente del certificado de ≥50,000 Ciclos Martindale

Inflamabilidad EN 1021 - 1 (cigarillo) EN 1021 - 2 (cerilla) BS 7176 Low Hazard BS 5852 Ignition Source 5 BS 7176 Medium Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 (con CMHR 58 kg/m³ de espuma) UNI 9175 Classe 1 IM BS 476 Part 7 Class 1 (Adhered) EN 13501-1 Adhered Class B, s1 ,d0 BS 5867-2: Type B Curtains & Drapes IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK doméstico cigarillo y cerilla) <i>Nota: El rendimiento de la Inflamabilidad depende de los componentes usados; todos los detalles se enumeran en nuestros certificados. Los clientes deben asegurarse de que todos sus muebles cumplan con los estándares necesarios.</i>

Solidez a la luz 4-5 (ISO 105 - B02)
Solidez al rozamiento Húmedo: 3, Seco: 4 (ISO 105 - X12)

Acústico Propiedades Acústicamente transparente. Gráficos disponibles bajo petición

Limpieza Uso aspirador regularmente. Limpiar con un producto usando jabón y agua o producto limpieza para tapicerías. Para una limpieza más profunda usen vapor o limpieza en seco profesional. Los detalles completos se encuentran en nuestra guía de limpieza y desinfección.
--


*Los resultados de los tests de abrasion son altamente variables, por lo tanto no son un indicador fiable del rendimiento del desgaste del tejido. Todos los certificados externos dan 10 años de garantía. Internamente especificamos el producto a >35.000 ciclos que entendemos como es el método realista para la repetición de los tests.

El rendimiento técnico y medio Ambiental declarado de un tejido puede verse afectado por el tratamiento que se aplique posteriormente. La garantía de producto que ofrecemos en Camira para los tratamientos de los tejidos es de 5 años.

Tengan en cuenta que el rendimiento de las costuras depende de como se haya hecho la misma. Recomendamos que se sigan los consejos de costura o cosido apropiados.

Entre tintados existe la posibilidad de una variación de color siempre dentro de una tolerancia comercia. Nos reservamos el derecho de modificar las especificaciones técnicas sin previo aviso. Los derechos de diseño no registrados y los derechos de autor son propiedad exclusiva de Camira Fabrics Limited.



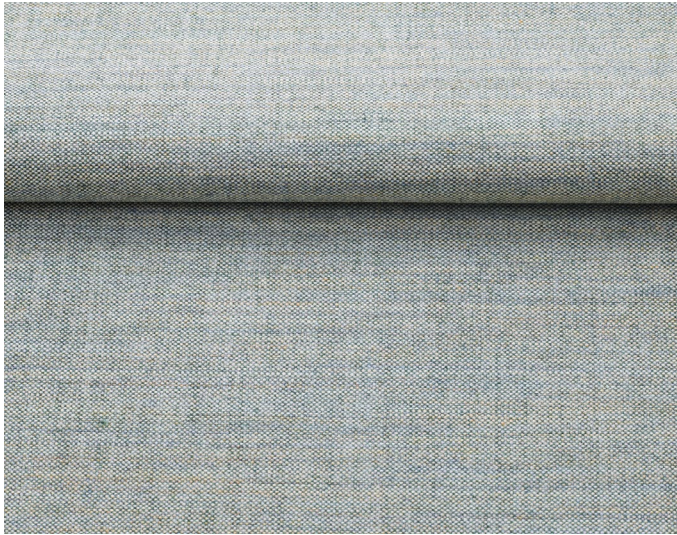

Remix 3

Design: Giulio Ridolfo

Type: Upholstery, panel fabric

Composition: 90% new wool, 10% nylon

Yarn type: Worsted

Binding: Plain

Width: Approx. 140 cm, 55 inches

Weight: Approx. 420 g/lin.m, 13.6 oz/ly

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week.
Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year
warranty



0575/24

Excellence

Acoustic



Remix 3

Abrasion

Approx. 100.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 5, EN ISO 12945

Seam slippage

Seam parallel to warp: 5.0 mm parallel to weft: 3.0 mm
EN ISO 13 936-2 180 Newton

Lightfastness

Note 5-7 ISO 105-B02

Fastness to rubbing

Dry note 3-5 ISO 105-X12

Wet note 3-5 ISO 105-X12

Absorption

0.55/Class D (flat), 0.80/Class B (waved) EN ISO 354

Airflow

465 Pa s/m EN 29053

Flame resistance

AS/NZS 1530.3

AS/NZS 3837 class 2

ASTM E84 Class A Unadhered

ASTM E84 Class A Adhered

BS 5852 crib 5 with treatment *

BS 5852 part 1

EN 1021-1/2

EN 13501 B-s2, d0 wrapped, with treatment *

GB 50222 B1 with treatment (Chinese) *

IMO FTP Code 2010 Part 7 with treatment *

IMO FTP Code 2010 Part 8

NF D 60 013

NFPA 260

ÖNORM B1/Q1

SN 198 898 5.3 with treatment *

UNI 9175 1IM

US Cal. Bull. 117-2013

Free from added flame retardant chemicals as standard

** To pass this test flame retardant treatment is necessary.
We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

kvadrat

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013

Dry & Wet Crocking

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.5

Colour Fastness to Light

Grade 4.0 minimum 40 hours

Physical properties

Pilling Class 5

Breaking Strength warp 132 / weft 138 lbs.

Seam Slippage warp 126.5 / weft 130 lbs.

Abrasion

100.000 cycles Martindale – High Traffic / Public Spaces

Benefits of wool

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/
give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

Quality benefits

Complies with Möbelfakta

Very good abrasion

Good lightfastness

Flame retardant

Environmental benefits

EU Ecolabel compliant

Free of intentionally added PFAS

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

Green building certificates

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): 3rd Party Verified.

ISO 14025 & EN 15804. Developed in accordance with the
European standard EN 15804+A2.

Health Product Declaration (HPD): Declaring textile content
and substance

Country of origin

United Kingdom

Launch

2007

Warranty


10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard
material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk

kvadrat

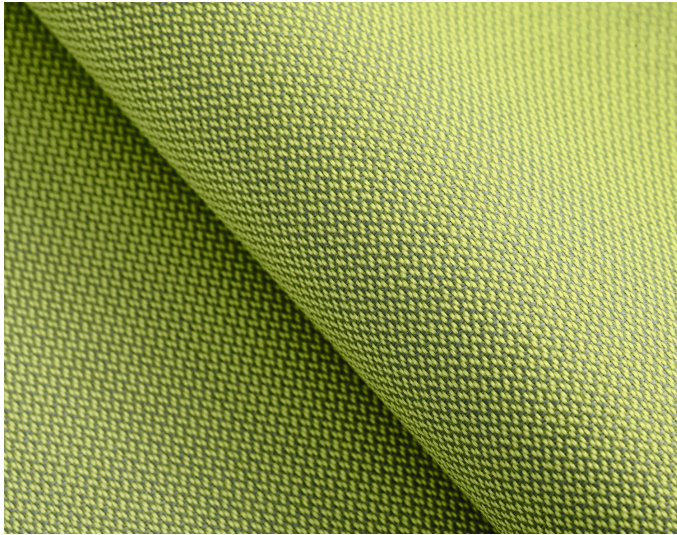

Revive 1

Design: Georgina Wright

Type: Upholstery, panel fabric

In accordance with California Bill AB 2998 and similar legislation within the United States, this product may not be used as upholstery. It can be used for vertical applications.

Composition: 100% recycled polyester FR

Yarn type: Filament

Binding: Dobby

Width: Approx. 140 cm, 55 inches

Weight: Approx. 420 g/lin.m, 13.6 oz/ly

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Also washable at 60-80°C, half wash load. Drip drying.

Mount in moist condition. Shrinkage app. 2% at 60°C.

Be aware of increased shrinking and creasing the higher the temperature.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year
warranty



Revive 1

Abrasion

Approx. 60.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 4-5, EN ISO 12945

Seam slippage

Seam parallel to warp: 3.5 mm parallel to weft: 4 mm
EN ISO 13 936-2 180 Newton

Lightfastness

Note 5-7 ISO 105-B02

Fastness to rubbing

Dry note 5 ISO 105-X12

Wet note 4-5 ISO 105-X12

Absorption

0.55/Class D (flat), 0.80/Class B (waved) EN ISO 354

Airflow

597 Pa s/m EN 29053

Flame resistance

AS/NZS 3837 class 1

ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered

BS 5852 crib 5 with treatment *

BS 5852 ignition source 3

BS 5852 part 1 with treatment *

DIN 4102 B1

EN 1021-1/2

IMO FTP Code 2010 Part 8

NFPA 701

ÖNORM B1/Q1

SN 198 898 5.3 with treatment *

UNI 9175 1IM

UNI 9177 Classe 1

US Cal. Bull. 117-2013

** To pass this test flame retardant treatment is necessary.*

We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants

kvadrat

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013

Dry & Wet Crocking

Dry Crocking: Grade 5.0

Wet Crocking: Grade 5.0

Colour Fastness to Light

Grade 5.0 minimum 40 hours

Physical properties

Pilling Class 4-5

Breaking Strength warp 323 / weft 191 lbs.

Seam Slippage warp 91.5 / weft 93.5 lbs.

Abrasion

60.000 cycles Martindale – High Traffic / Public Spaces

Quality benefits

Complies with Möbelfakta

Very good abrasion

Good lightfastness

Permanent flame retardant

Washable

Environmental benefits

Recycled content

Free of intentionally added PFAS

Mono-material designed for circularity

Follow the EU Ecolabel dye restrictions incl. AZO dye and heavy metal restrictions

No use of halogen-based flame retardants (incl. brominated and chlorinated)

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Green building certificates

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content and substance

Country of origin

China

Launch

2014

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk

kvadrat